




Extremely versatile!

The Imer tool carrier frames

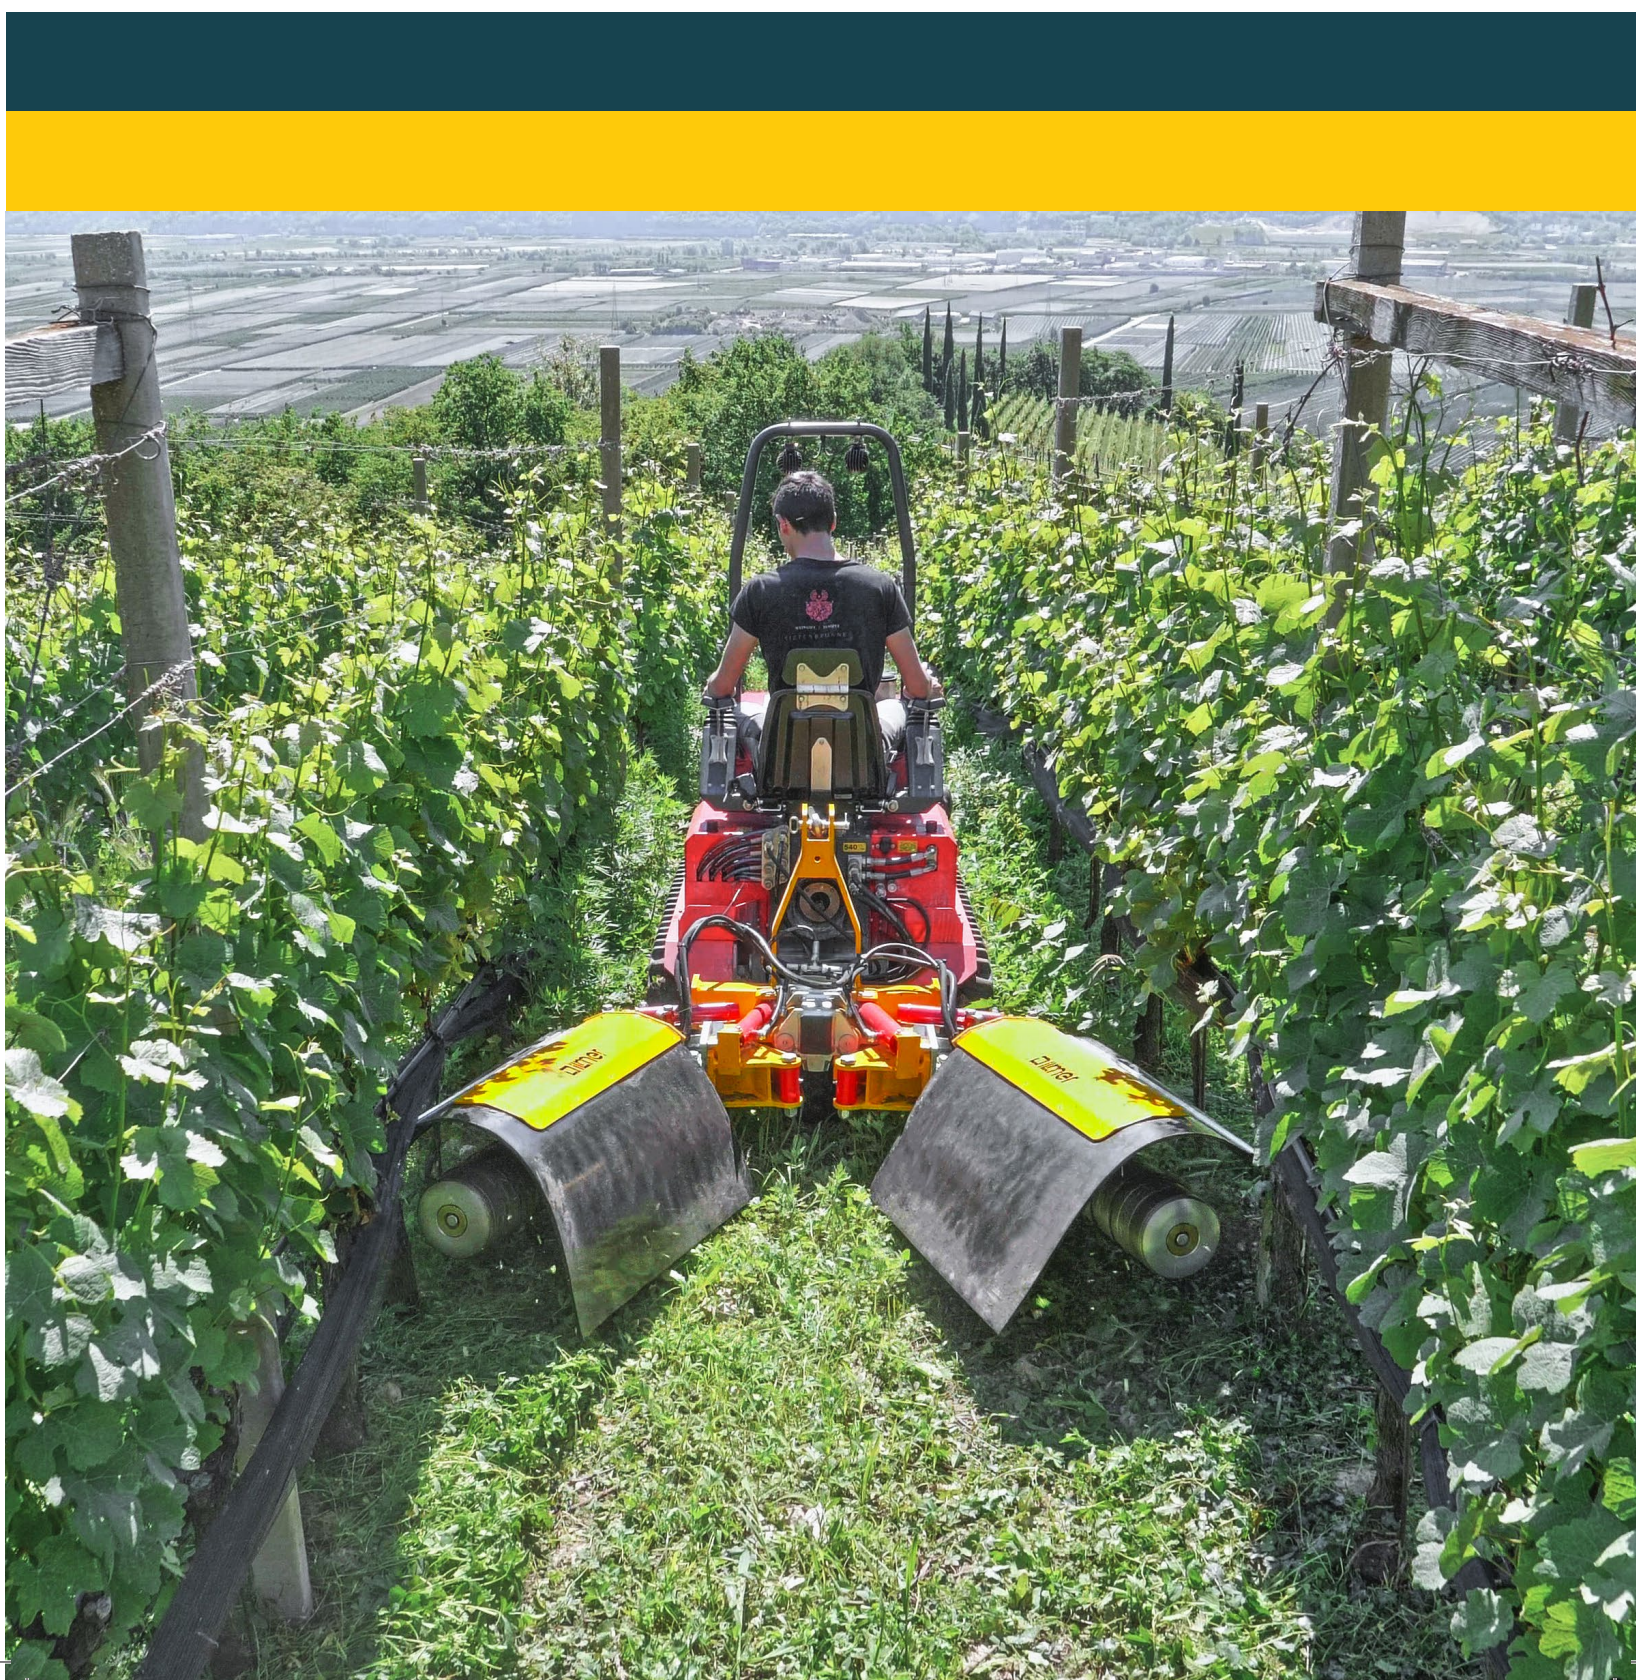


Extremely compact!

The GT-Vario for rear mounting

Model Attachments	External width (in cm) Centre of tractor	For row spacing	Working width	Weight	Oil demand	Depth
GT-Vario rear compact - <i>double-sided or single-sided</i>						
undervine line mow- er FR-EVO10-GT	 60 60	1,50 – 2,60 m	20 cm (per side)	170 kg 205 kg	12-18l/min variable (per Attachment) + additional free return	115 cm
	 130 130					
undervine line mow- er FR-EVO16-GT	 60 60	1,50 – 2,90 m	35 cm (per side)	190 kg 225 kg		145 cm
	 145 145					
GT-Vario rear - <i>double-sided or single-sided</i>						
undervine line mow- er FR-EVO10-GT	 75 75	1,80 – 3,60 m	20 cm (per side)	175 kg 230 kg	12-18l/min variable (per Attachment) + additional free return	120 cm
	 180 180					
undervine line mow- er FR-EVO16-GT	 75 75	1,80 – 3,90 m	35 cm (per side)	195 kg 250 kg		150 cm
	 195 195					



Extremely compact!
For maximum maneuverability and optimum undervine-care, from a row width of 1,50 m.

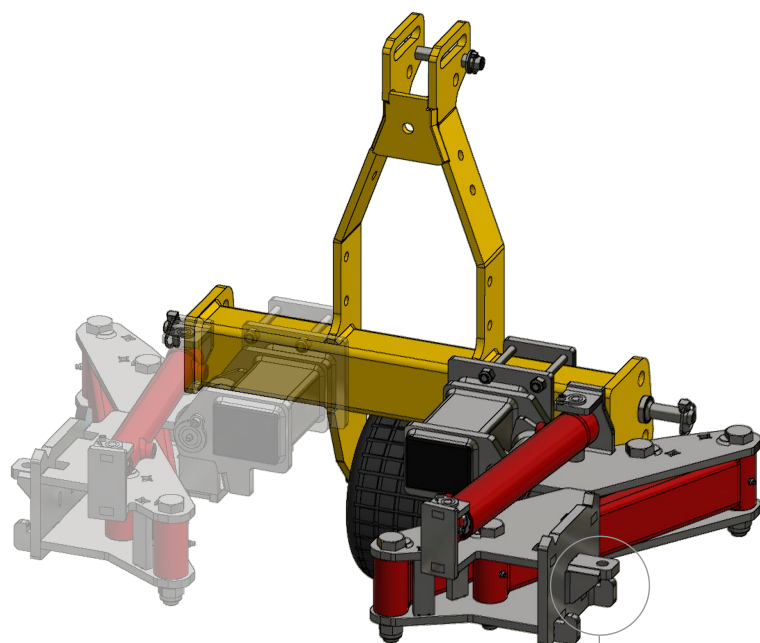


Many tools – One carrier!

Fast changing between attachments thanks to the quick hitch system


Adjustable inclination!

Easily adjustable inclination and working angle of the attachments thanks to the hydraulic top link (optional)

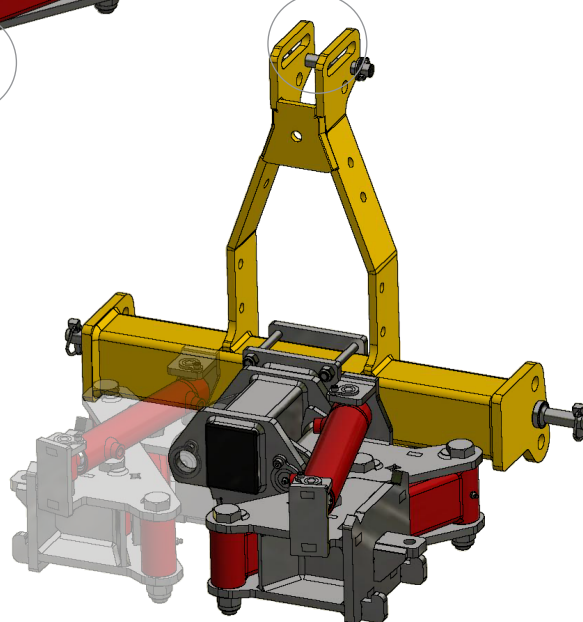

Individually configurable!

Adjustable working width, synchronous or separate hydraulic width adjustment, oil-supply from tractor or autonomous

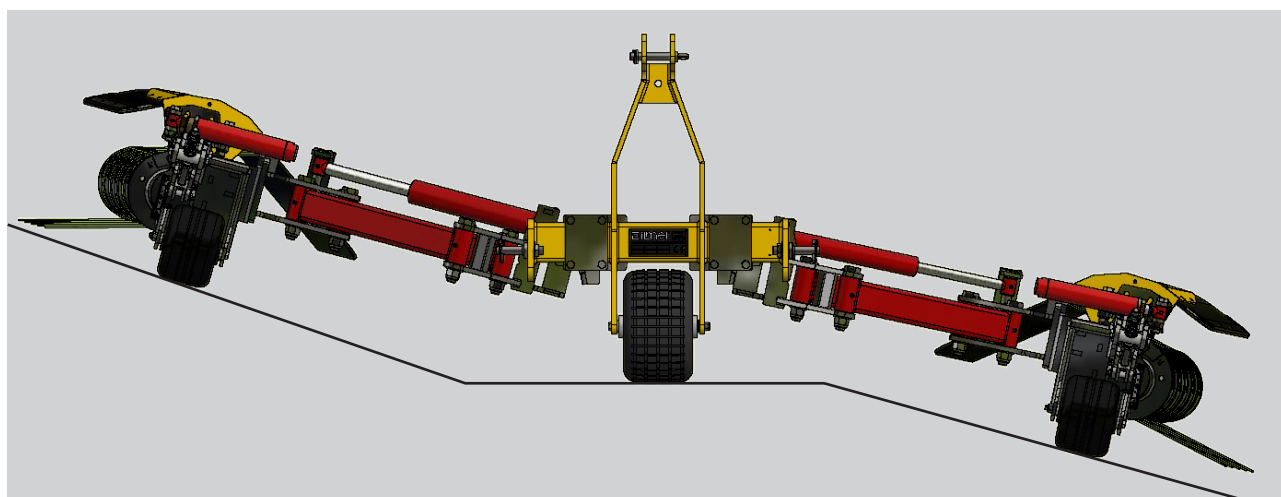


Single suspension!

Freely movable carrier arms for perfect adjustment of the attachments to the ground contours, even in the most difficult conditions.

Maximum configurability!

The GT-Vario for front mounting

Model Attachments	External width (in cm) Centre of tractor	For row spacing	Working width	Weight	Oil demand	Depth
GT-Vario front - <i>double-sided</i> or <i>single-sided</i>						
undervine line mower FR-EVO10-GT	75 75 200 200	1,80 – 4,00 m	20 cm (per side)	200 kg 355 kg	12-18l/min variable (per Attachment) + additional free return	145 cm
undervine line mower FR-EVO16-GT	75 75 215 215	1,80 – 4,30 m	35 cm (per side)	220 kg 390 kg		145 cm
with undervine/-tree sweeper RB-80	100 100 190 190	2,00 – 3,80 m	80 cm (per side)	170 kg 290 kg		150 cm

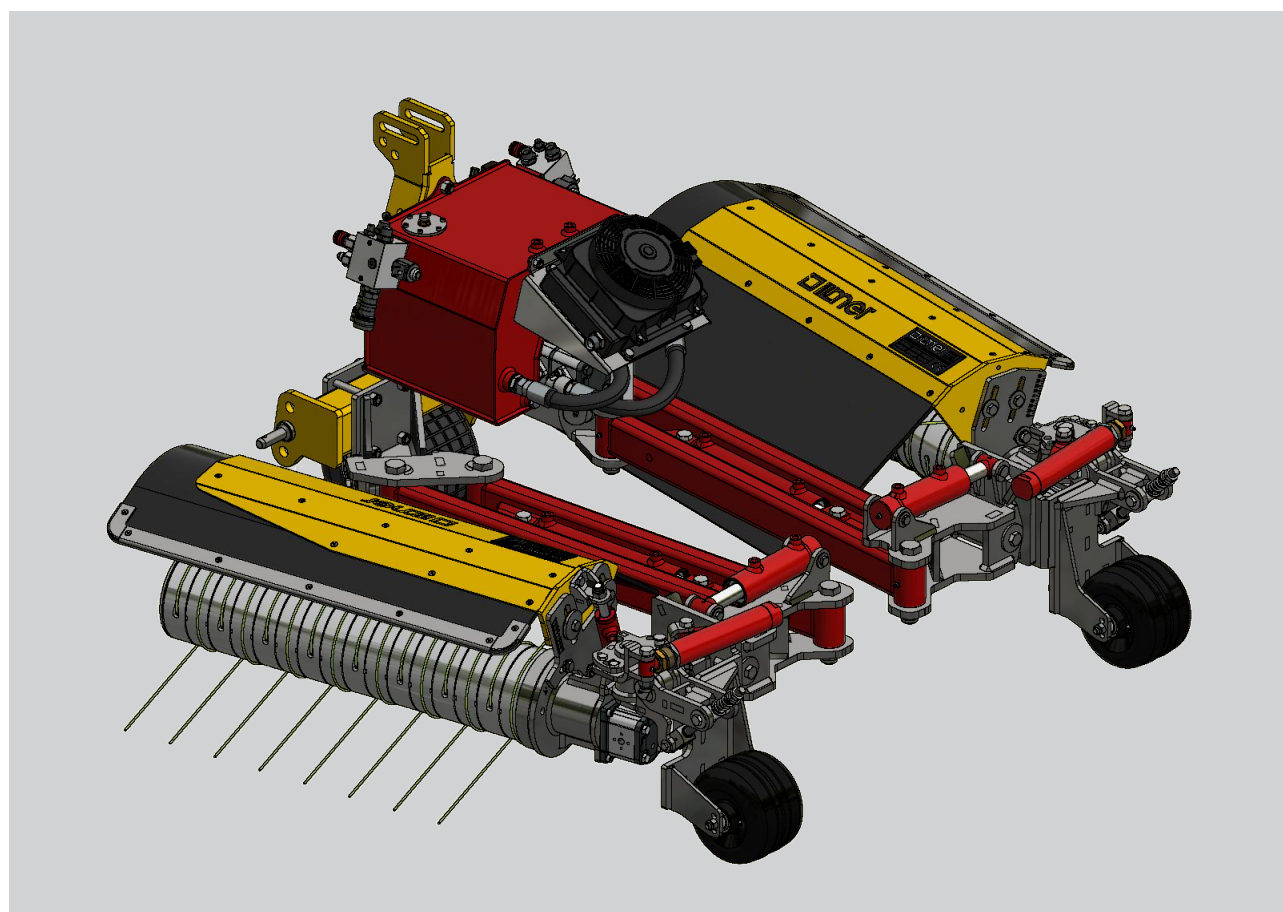

Individually configurable!

Mounted on three-point hitch or bolted directly to the front plate of the tractor, synchronous or separate hydraulic width adjustment.


Depending on the power demand, the oil-supply can be provided from the tractor or autonomous.

Adjustable inclination!

Easily adjustable inclination and working angle of the attachments thanks to the hydraulic top link (optional)


Best running characteristics!

A central wheel with rubber tyre ensures optimum running properties in every situation

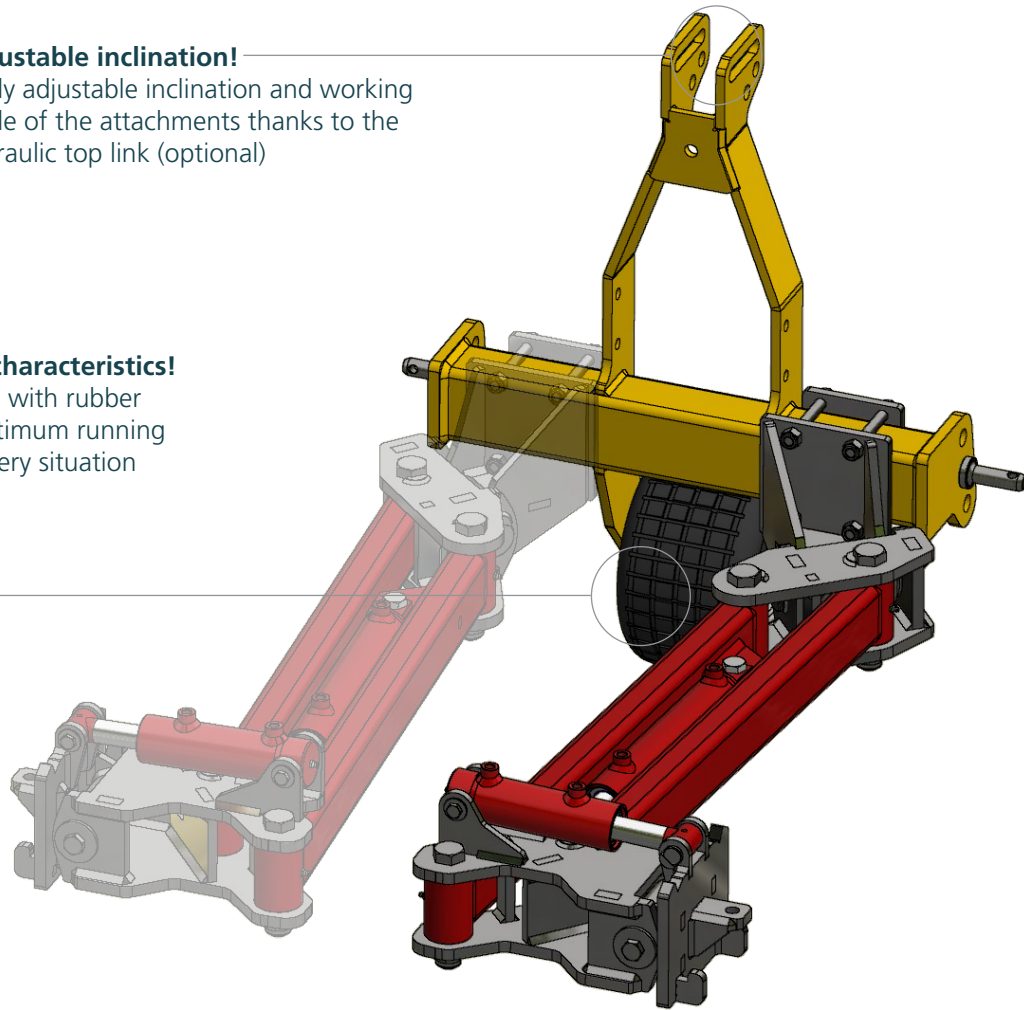


Single suspension!

Freely movable carrier arms for perfect adjustment of the attachments to the ground contours, even in the most difficult conditions

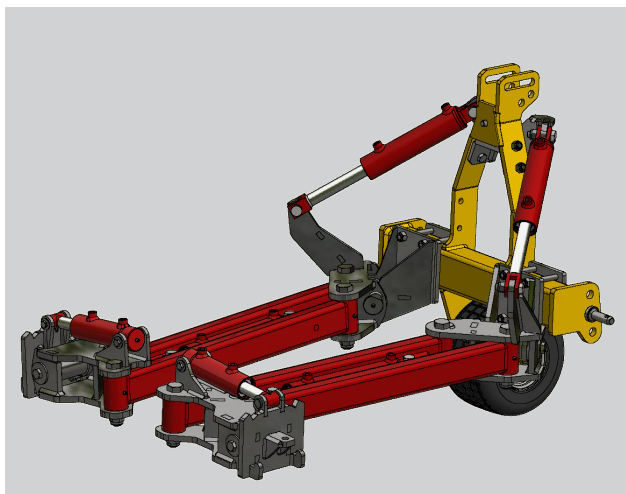

Hydraulic lifting!

Thanks to the hydraulic lifting arms (optional) it's possible to work single-sided without problems.

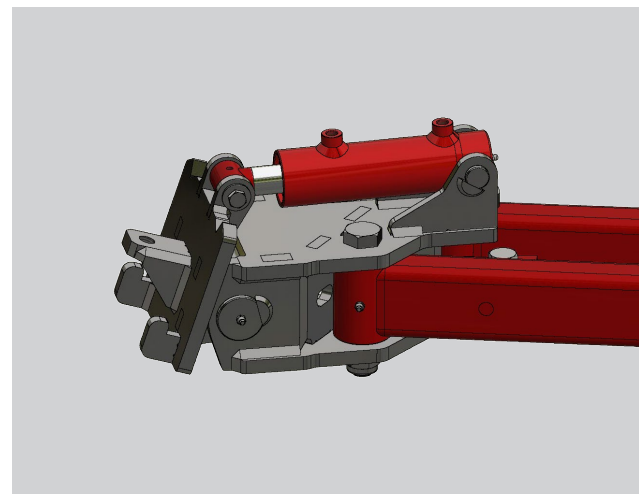


Quick hitch system!

Fast changing between attachments thanks to the quick hitch system. Working angle adjustable via hydraulic tilt joint.

Many tools – One carrier!


The GT-Eco

Model Attachments	External width (in cm) Centre of tractor	For row spacing	Working width	Weight	Oil demand	Depth
GT-ECO - single-sided					1x DA	
undervine line mo- wer FR-EVO10-GT	70	from 1,60 m	20 cm	215 kg	2x DA adjustable each 12-18l/min 1x free return	100 cm
	200					
undervine line mo- wer FR-EVO16-GT	70	from 1,60 m	35 cm	230 kg		130 cm
	215					
with undervine/-tree sweeper RB-80	100	from 1,80 m	80 cm	180 kg		60 cm
	190					
with star/finger weeder	60	from 1,50 m	15 - 30 cm	245 kg		70 cm
	150					
GT-ECO - double-sided					2x DA	
undervine line mo- wer FR-EVO10-GT	90 90	2,10 - 3,80 m	20 cm (per side)	270 kg	2x DA adjustable each 12-18l/min 1x free return	110 cm
	200 200					
undervine line mo- wer FR-EVO16-GT	90 90	2,10 - 4,10 m	35 cm (per side)	285 kg		140 cm
	215 215					
with undervine/-tree sweeper RB-80	120 120	2,40 - 3,80 m	80 cm (per side)	235 kg		70 cm
	190 190					
with star/finger weeder	80 80	1,80 - 3,20 m	15 - 30 cm (per side)	300 kg		80 cm
	150 150					

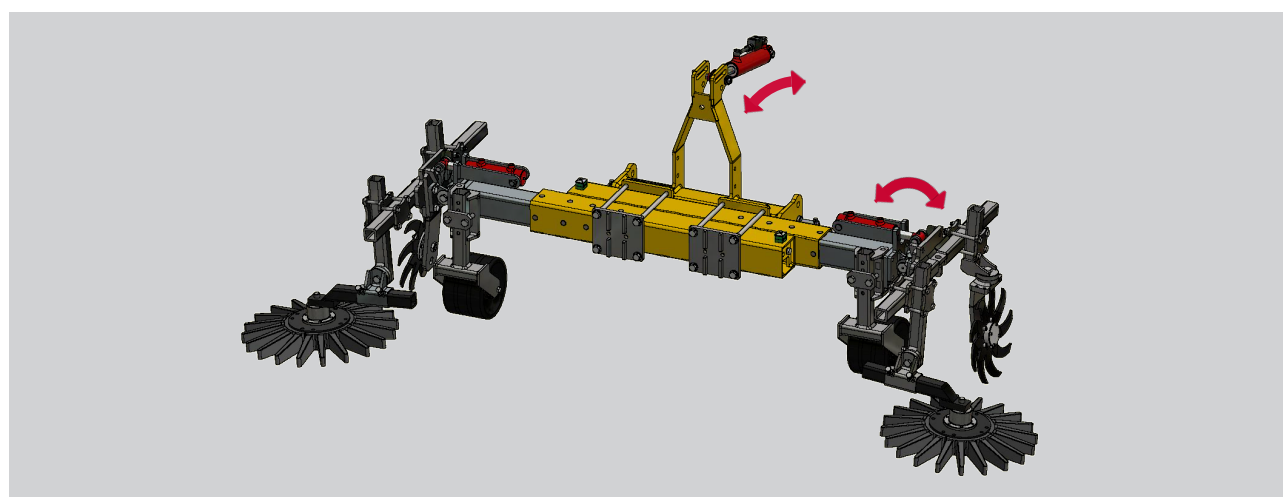


Fully adjustable!

Hydraulic top link and hydraulic tilt joint (both optional) allow for perfect adjustment of the working angle of the attachments.

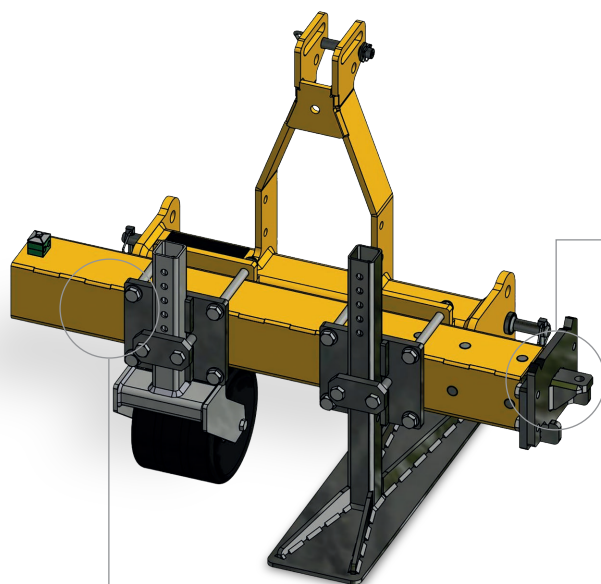


Many tools – One carrier!
Fast changing between attachments thanks to the quick hitch system


Individually configurable!
Depending on the power demand, the oil-supply can be provided from the tractor or autonomous

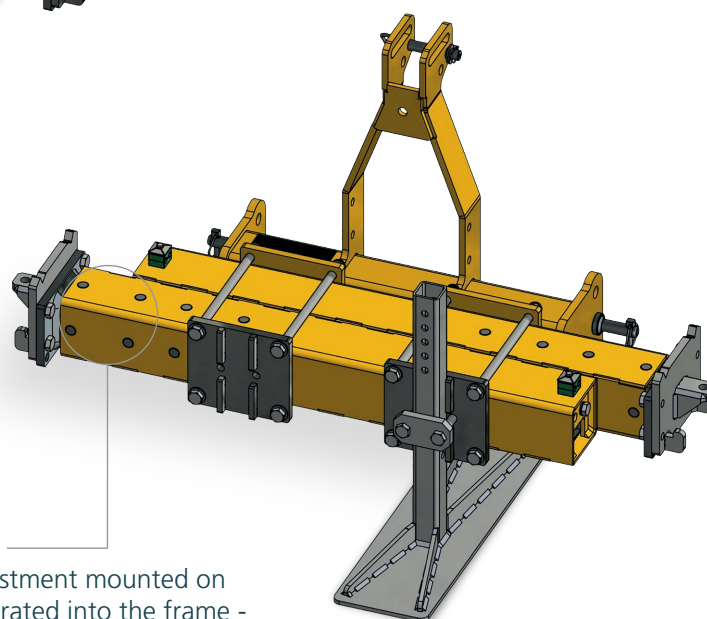

Maintenance-free!
Hydraulic width adjustment mounted on Teflon, cylinder integrated into the frame - all completely maintenance-free

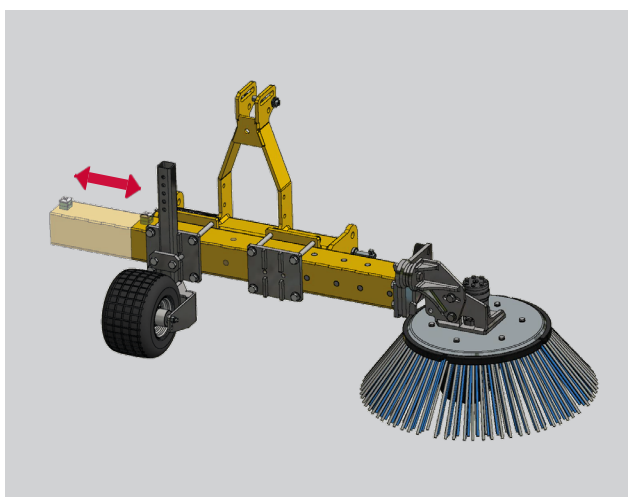

Lateral adjustment!
60 cm hydraulically and up to 30 cm manually adjustable carrier arm.

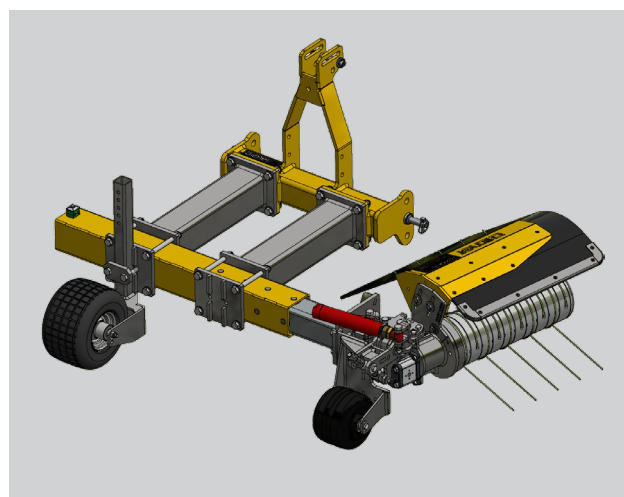

Front or rear mounting!
For front mounting, appropriate spacer profiles are screwed on depending on the implement.



MADE IN SOUTH TYROL

ILMER Maschinenbau Ltd.
Staatsstraße 74 | I-39020 Kastelbell-Tschars (BZ)
Phone +39 0473 624 133 | Fax +39 0473 624 499
info@ilmer.it | www.ilmer.it